

# Triggering Conditions and Data Quality Pre-Crash Information

CAR 2 CAR Communication Consortium



**CAR 2 CAR**  
COMMUNICATION CONSORTIUM

## About the C2C-CC

Enhancing road safety and traffic efficiency by means of Cooperative Intelligent Transport Systems and Services (C-ITS) is the dedicated goal of the CAR 2 CAR Communication Consortium. The industrial driven, non-commercial association was founded in 2002 by vehicle manufacturers affiliated with the idea of cooperative road traffic based on Vehicle-to-Vehicle Communications (V2V) and supported by Vehicle-to-Infrastructure Communications (V2I). Today, the Consortium comprises 61 members, with 11 vehicle manufacturers, 31 equipment suppliers and 29 research organisations.

Over the years, the CAR 2 CAR Communication Consortium has evolved to be one of the key players in preparing the initial deployment of C-ITS in Europe and the subsequent innovation phases. CAR 2 CAR members focus on wireless V2V communication applications based on ITS-G5 and concentrate all efforts on creating standards to ensure the interoperability of cooperative systems, spanning all vehicle classes across borders and brands. As a key contributor, the CAR 2 CAR Communication Consortium works in close cooperation with the European and international standardisation organisations such as ETSI and CEN.

## Disclaimer

The present document has been developed within the CAR 2 CAR Communication Consortium and might be further elaborated within the CAR 2 CAR Communication Consortium. The CAR 2 CAR Communication Consortium and its members accept no liability for any use of this document and other documents from the CAR 2 CAR Communication Consortium for implementation. CAR 2 CAR Communication Consortium documents should be obtained directly from the CAR 2 CAR Communication Consortium.

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media. © 2020, CAR 2 CAR Communication Consortium.

## Document information

<b>Number:</b>	2066	<b>Version:</b>	n.a.	<b>Date:</b>	16/12/2020
<b>Title:</b>	Triggering Conditions and Data Quality Pre-Crash Information			<b>Document Type:</b>	RS
<b>Release</b>	1.5.2				
<b>Release Status:</b>	Public				
<b>Status:</b>	Final				

**Table 1: Document information**

**Changes since last version**

Title:	<b>Triggering Conditions and Data Quality Pre-Crash Information</b>		
Date	Changes	Edited by	Approved
16/12/2020	Minor editorial changes	Release Management	Steering Committee
31/07/2020	Minor corrections	Release Management	Steering Committee
27/03/2020	No changes	Release Management	Steering Committee
13/09/2019	Initial Version	Release Management	Steering Committee

**Table 2: Changes since last version**

## Table of contents

About the C2C-CC .....	1
Disclaimer .....	1
Document information .....	2
Changes since last version.....	3
Table of contents.....	4
List of tables .....	4
1 Introduction .....	5
2 Triggering conditions .....	6
2.1 Exchange of Pre-Crash Information .....	6
2.1.1 Description of Use Case .....	6
2.1.2 Relations to other Use Cases .....	6
2.1.3 Triggering Conditions.....	7
2.1.4 Termination Conditions.....	8
2.1.5 Update .....	9
2.1.6 Repetition Duration and Repetition Interval.....	9
2.1.7 State Diagram.....	10
2.1.8 Traffic class.....	10
2.1.9 Message Parameter .....	10
2.1.10 Networking and Transport Layer .....	14
2.1.11 Security Layer.....	14

## List of tables

Table 1: Document information.....	2
Table 2: Changes since last version .....	3
Table 3: Information quality of 'Exchange of Pre-Crash Information' .....	8
Table 4: DENM data elements of 'Exchange of Pre-Crash Information' .....	13

---

## 1 Introduction

**Other (informational)**

**RS\_tcPci\_024**

This document describes the triggering conditions for the exchange of Pre-Crash Information, when a vehicle detects a critical situation (e.g. an obstacle) ahead.

---

## 2 Triggering conditions

---

### 2.1 Exchange of Pre-Crash Information

#### 2.1.1 Description of Use Case

##### Other (informational)

**RS\_tcPci\_001**

This use case describes the process for DENMs to be sent by a vehicle, when a critical situation ahead is detected, e.g. when the ego vehicle approaches a slower or stationary vehicle. In cases where a collision is likely, dedicated information is shared with all vehicles in the immediate surrounding. For example, this information contains measured values about the relative distance and speed between the ego and the critical object. Each receiving vehicle may activate its Pre-Crash measures when it assumes itself to be under risk and the situation is considered as sufficiently critical. Nevertheless, the behavior of the receiving vehicle(s) is out of scope of this document and not specified.

##### Other (informational)

**RS\_tcPci\_002**

This use case requires data elements which are not yet part of latest version of [EN 302 637-3]. It is intended to update the EN accordingly and mass deployment of this use case shall be delayed until the [EN 302 637-3] is finally updated. In consequence this use case description shall be considered as part of standardization process, where the required data elements will be identified and verified.

The required extension (ASN.1 only) of the existing DENM specification is fully specified in 'C2CCC\_RS\_2067\_Pre-CrashInformation\_AsnExtension'.

##### Other (informational)

**RS\_tcPci\_003**

This use case uses a new *subCauseCode* of an already existing *CauseCode*. The new *subCauseCode* is not yet specified in ETSI and should be introduced during the change process.

#### 2.1.2 Relations to other Use Cases

##### Other (informational)

**RS\_tcPci\_004**

This use case can be active in parallel with one or more of the following use cases, since they share their operational scope:

- Exchange of IRCs - Request IRC
- Exchange of IRCs - Response IRC
- Dangerous Situations - Electronic Emergency Brake Light
- Dangerous Situations - Automatic Brake Intervention
- Dangerous Situations - Reversible Occupant Restraint System Intervention

This use case and *Exchange of IRCs* shares their triggering conditions and have similar thresholds for triggering the use case. Due to the low TTC value of less than 1.5 s, a detection of dangerous situation use case, e.g. caused by a hard braking maneuver, is considered as likely, too.

Note: When this use case is active, the parallel activation of one of the Dangerous Situation use cases is still possible. Both use cases can and should be active in parallel, but depending on the DCC restrictions they may compete for message transmission. This is caused by the high update rate for these DENMs (10 Hz each).

### 2.1.3 Triggering Conditions

#### 2.1.3.1 Preconditions

**Requirement**

**RS\_tcPci\_005**

The on-board sensors that are used for the criticality evaluation are operational and are not reporting errors (e.g. electrical issues) or functional limitations (e.g. blindness).

Tested by:

---

#### 2.1.3.2 Use Case Specific Conditions

**Requirement**

**RS\_tcPci\_006**

The use case shall be triggered if the host vehicle has identified a critical object - using its on-board sensors - based on one of the following conditions:

- a) An object that likely is a vehicle and is located ahead of the host vehicle based on the vehicles' estimated paths and dimensions.
- b) The detected object is critical, because it is triggering the FCW system
- c) The detected object is critical, because it is triggering the AEB system

Additionally, both of the following conditions need to apply to the critical object:

- d) The computed Time To Collision (TTC) with the identified object is smaller than 1,5 s
- e) The relative speed between the identified object and the host vehicle is smaller than - 10 km/h

Note: relative speed is measured in the host vehicle coordinate system and thus negative when the object is closing in.

Tested by:

---

**Requirement**

**RS\_tcPci\_007**

The computation of the TTC shall include the ego velocity, ego acceleration, object velocity and relative distance between the ego and the critical object.

Tested by:

---

**Requirement**

**RS\_tcPci\_008**

The use case shall not be triggered again as long as a previously detected use case is not terminated. In the case of a change of the critical object, the previous detection shall be terminated and the use case shall be triggered again immediately (with a new DENM and thus new ActionID).

Tested by:

---

#### 2.1.3.3 Information Quality

**Requirement**

**RS\_tcPci\_009**

The value of the data element *informationQuality* in the DENM depends on the way the event is detected. The *informationQuality* value shall be set based on the following table (if multiple

conditions apply, the highest value shall be selected):

Event detection	Value of InformationQuality
No TRCO-compliant implementation	unknown(0)
Conditions a) and d) and e) are fulfilled	1
Conditions b) and d) and e) are fulfilled	2
Conditions c) and d) and e) are fulfilled	3

**Table 3: Information quality of ‘Exchange of Pre-Crash Information’**

Tested by:

### 2.1.4 Termination Conditions

#### Requirement

**RS\_tcPci\_010**

This use case is terminated by a cancellation of the originating vehicle C-ITS station. At the termination of the use case, update DENM request shall be terminated.

Tested by:

#### 2.1.4.1 Cancellation

#### Requirement

**RS\_tcPci\_011**

Once at least one of the following conditions is fulfilled continuously for more than 200 ms, the generation of a cancellation DENM shall be triggered:

1. No critical object is detected anymore.
2. The computed TTC with the critical object is greater than 2 s.
3. The relative speed between the host vehicle and the critical object is greater than -5 km/h.
4. The detected critical object has changed, i.e. another vehicle is now considered as the critical object.

Note: Different criticality thresholds are used for the cancellation such that toggling of the use case activation can be prevented.

Note: Repetition shall not be used for the cancellation. The critical situation is over, no more update DENMs will be sent and therefore, there is no harm in case the cancellation message is lost.

Tested by:

#### Requirement

**RS\_tcPci\_012**

When a cancellation DENM is triggered, all data elements in the management container of the cancellation DENM shall be updated.

Tested by:

#### 2.1.4.2 Negation

#### Requirement

**RS\_tcPci\_013**



---

A negation DENM shall not be used for this use case.

Tested by:

---

## 2.1.5 Update

### Requirement

**RS\_tcPci\_014**

The generated DENM shall be updated every 100 ms, as long as the use case is not terminated.

For each updated DENM, all data elements within the DENM shall be updated.

Tested by:

---

## 2.1.6 Repetition Duration and Repetition Interval

### Requirement

**RS\_tcPci\_015**

A repetition of the DENM shall not be used for this use case.

Tested by:

---

### 2.1.7 State Diagram

Other (informational)

RS\_tcPci\_016

The following diagram provides an overview of the envisioned operational behavior based on the previous requirements:

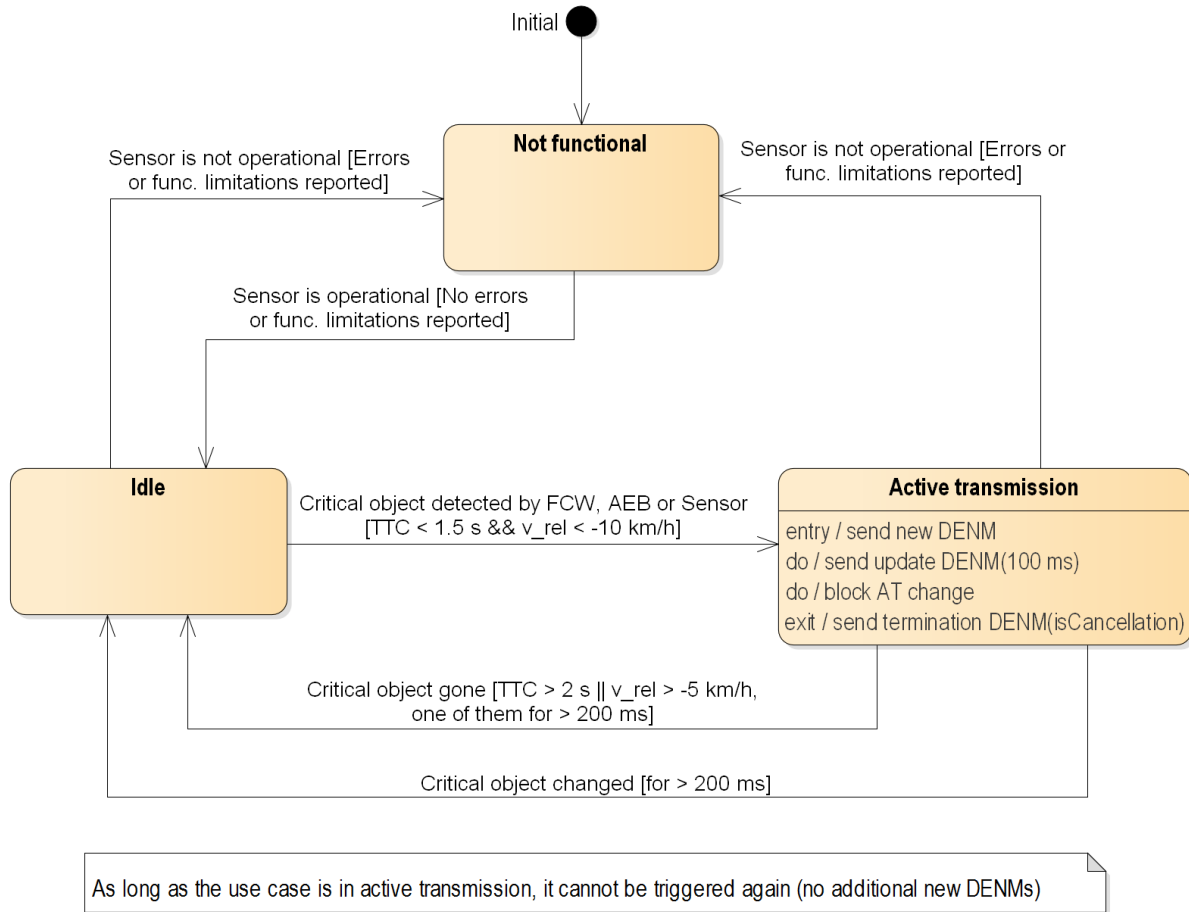


Figure 1: State diagram of the envisioned operational behaviour.

### 2.1.8 Traffic class

Requirement

RS\_tcPci\_017

For new, update and cancellation DENMs, the traffic class shall be set to 0.

Tested by:

### 2.1.9 Message Parameter

#### 2.1.9.1 DENM

Requirement

RS\_tcPci\_018

Table 4 specifies the data elements of the DENM that shall be set.

Data Field	Value
<b>Management Container</b>	

<i>actionID</i>	Identifier of a DENM. Shall be set according to [TS 102 894-2].
<i>detectionTime</i>	<i>Timestamppts</i> -Timestamp at which the event is detected by the originating vehicle C-ITS station. Shall be set according to [TS 102 894-2].
<i>referenceTime</i>	<i>Timestamppts</i> -Timestamp at which a new, update or cancellation DENM is generated. Shall be set according to [TS 102 894-2].
<i>termination</i>	Shall not be set in case of new or update DENM. Shall be set to <i>isCancellation</i> (0) in case of a cancellation DENM.
<i>eventPosition</i>	<i>ReferencePosition</i> . Shall be set according to [TS 102 894-2].
<i>relevanceDistance</i>	lessThan100m(1) Note: This shall also cover the worst case scenario of driving with nearly 250 km/h towards a dangerous end of queue ( $s = v \times t = 69,4 \text{ m/s} \times 1,5 \text{ s} = 104,2 \text{ m}$ ). Note: Per the GeoNetworking specification, applications in stations outside of the <i>relevanceDistance</i> to the event will not receive this message.
<i>relevanceTrafficDirection</i>	<i>allTrafficDirections</i> (0)
<i>validityDuration</i>	2 s Note: Value shall be larger than TTC.
<i>stationType</i>	The type of the originating vehicle C-ITS station. Shall be set according to [TS 102 894-2].
<b>Situation Container</b>	
<i>informationQuality</i>	See RS_tcPci_009.
<i>causeCode</i>	<i>collisionRisk</i> (97)
<i>subCauseCode</i>	<i>preCrashInformation</i> (5) Note: This <i>subCauseCode</i> is not yet defined in [EN 302 637-3].
<b>Location Container</b>	
<i>eventSpeed</i>	Speed of the originating vehicle C-ITS station. Shall be set according to [TS 102 894-2].
<i>eventPositionHeading</i>	Heading of the originating vehicle C-ITS station. Shall be set according to [TS 102 894-2].
<i>traces</i>	The data element shall not be populated for this use case. A minimum of data (e.g. one trace with zero elements) may be necessary to fulfill the ASN.1 requirements. Note: The trace is omitted since it seems not to be useable for relevance assessment by receiving stations. Receiving stations can still use the trace given in the sender's CAM.
<i>roadType</i>	Shall be set according to [TS 102 894-2]. Otherwise, if the information about the urban/non-urban status cannot be determined, the data element shall be omitted.
<b>Alacarte Container: PreCrashContainer</b>	

<i>perceivedObject</i>	A customized data field of a PerceivedObject of a CPM as described in [TR 103 562]. This data element contains all the relative information of the perceived object.
<i>PerceivedObject::objectID</i>	A constant identifier of the object. Shall be set according to [TR 103 562].
<i>PerceivedObject::timeOfMeasurement</i>	Relative time, describing the moment in time when the provided measurement data was generated by the on-board sensor. The relative value shall be provided in relation to the DE <i>detectionTime</i> .
<i>PerceivedObject::xDistance</i>	X-component (host vehicle reference frame) of the relative distance between the host vehicle reference point and the reference point of the measurement as measured by the on-board sensor. The measurement delay (measurement time to detection time) shall be less than 100 ms.
<i>PerceivedObject::yDistance</i>	Y-component (host vehicle reference frame) of the relative distance between the host vehicle reference point and reference point of the measurement as measured by the on-board sensor. The measurement delay (measurement time to detection time) shall be less than 100 ms.
<i>PerceivedObject::xSpeed</i>	X-component (host vehicle reference frame) of the relative speed between the host vehicle and the object as measured by the on-board sensor. The measurement delay (measurement time to detection time) shall be less than 100 ms.
<i>PerceivedObject::ySpeed</i>	Y-component (host vehicle reference frame) of the relative speed between the host vehicle and the object as measured by the on-board sensor. The measurement delay (measurement time to detection time) shall be less than 100 ms.
<i>PerceivedObject::yawAngle</i>	The yaw angle represents the relative angle measured between the host vehicle orientation and the vector perpendicular to the perceived object side ( <i>planarObjectDimension1</i> ), see also Figure 2. Shall be set according to [TR 103 562]. The measurement delay (measurement time to detection time) shall be less than 100 ms. This data element shall be optional.
<i>PerceivedObject::planarObjectDimension1</i>	Perceived width of the side of the object on which the reference point of the measurement is located. The measurement delay (measurement time to detection time) shall be less than 100 ms. Note: This width might be shorter or longer than the real object width due to sensor vision limitations (e.g. obstructions).

<i>objectStationId</i>	<p>The stationID of the object for which the values are provided. Shall be set according to [TS 102 894-2].</p> <p>This data element shall be optional.</p> <p>Note: The stationID of the object may change during the use case, when the object changes its AT.</p>
<i>timeToCollision</i>	<p>The calculated (or measured) time to collision towards the object, determined by the host vehicle.</p> <p>This data element shall be optional.</p>
<i>hostVehicleOrientation</i>	<p>Absolute orientation of the host vehicle body in the world coordinate system. Shall be set according to [TR 103 562].</p>
<i>impactSection</i>	<p>Indication of the object’s section where the impact will most likely occur. When the target object is likely to be a vehicle, than this data element should be made available, otherwise (every other type of object) the data element shall not be provided.</p> <p>Note: It is permissible to derive the required object dimensions and orientation from models to provide a best guess.</p>

**Table 4: DENM data elements of ‘Exchange of Pre-Crash Information’**

Tested by:

### 2.1.9.2 Details on the reference point of the measurement

#### Other (informational)

RS\_tcPci\_019

For the Pre-Crash Information it is assumed that the reference point of the measurement is always located in the middle of the side for which also the perceived object width is given.

The following graphic gives an overview of the different distance and direction data elements and their relations to each other.

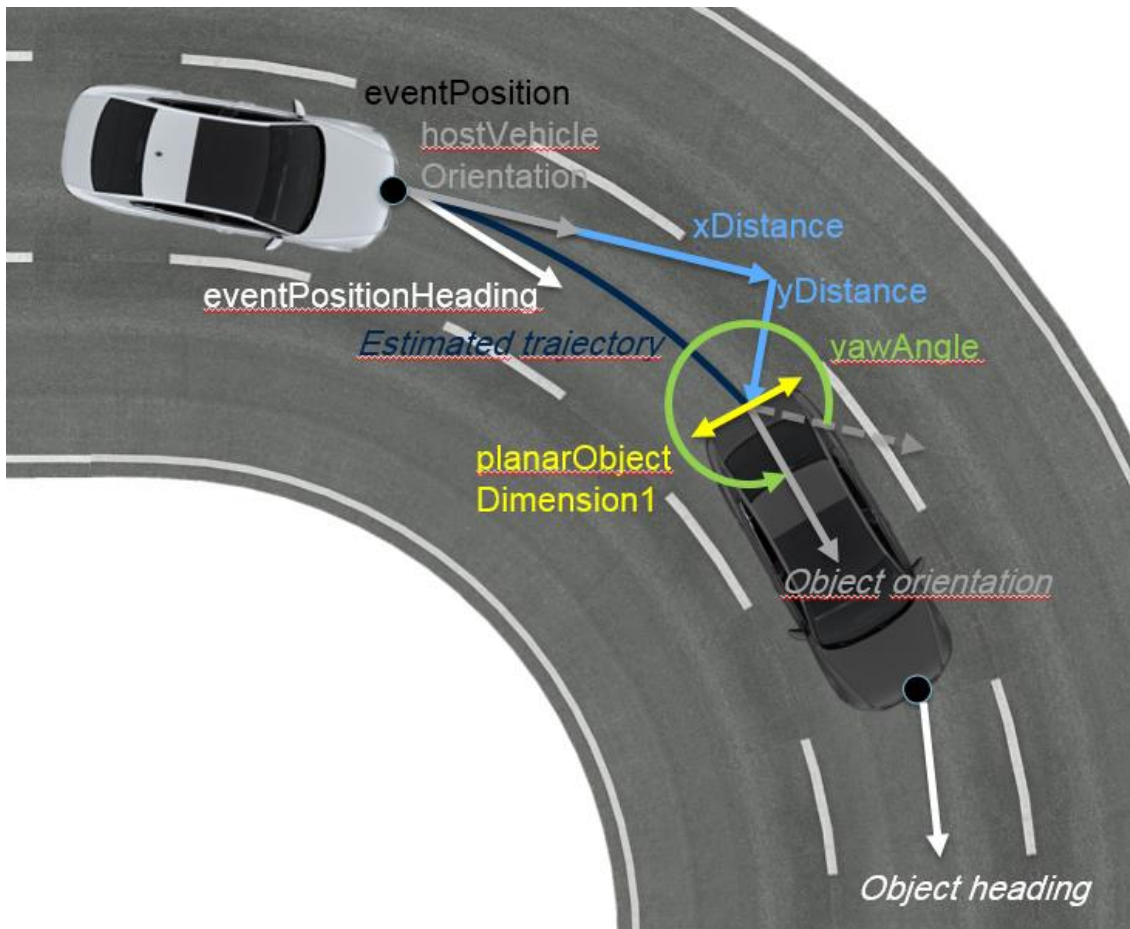


Figure 2: Representation of the measurement point for PCI and related quantities. Values written in italic are depicted to support a better understanding, but they are not part of the DENM; Note: The shown y-distance is of negative value in the vehicle coordinate system according to [ISO 8855].

### 2.1.9.3 CAM

#### Requirement

RS\_tcPci\_020

CAM adaption shall not be used for this use case.

Tested by:

### 2.1.10 Networking and Transport Layer

#### Requirement

RS\_tcPci\_021

The facility layer's interface parameter *Destination area* shall be equal to a circular shape with radius equal to *relevanceDistance*.

Tested by:

### 2.1.11 Security Layer

#### Requirement

RS\_tcPci\_022

An AT change shall be blocked in the following cases:

1. While the use case is active
2. As long as the *validityDuration* of the cancellation DENM is not expired.

Corresponding new, update and cancellation DENMs shall be sent with the same AT.

Tested by:

---